




Cangzhou Changyuan Fittings Co.,ltd

Add:No.26 Shigang Road,Development Zone,Cangzhou ,Hebei,China Pc:061000

Http://www.con-well.com Email:con-well@vip.163.com sale@con-well.com

1PC FLANGED BALL VALVES , WAFER TYPE PN16

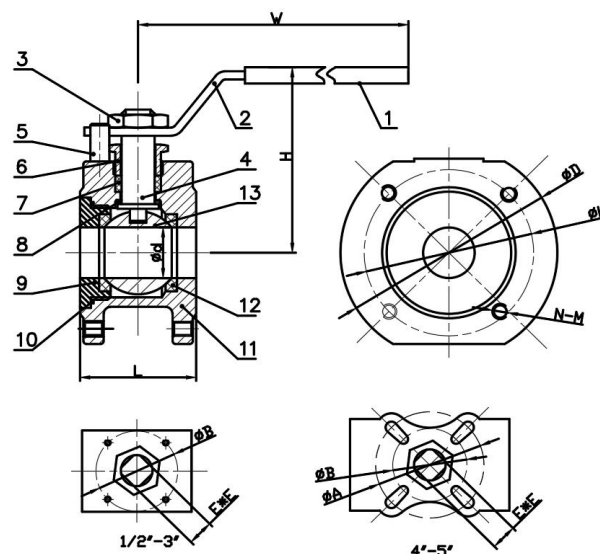

| Size | d | L | H | W | A | B | D | E*E | K | N-M | ISO5211 |
|-------|------|-------|-------|-------|-------|------|-------|-------|-------|-------|---------|
| DN15 | 15.0 | 39.0 | 64.0 | 130.0 | | 36.0 | 95.0 | 9*9 | 65.0 | 4-M12 | F03 |
| DN20 | 20.0 | 44.0 | 70.0 | 130.0 | | 36.0 | 105.0 | 9*9 | 75.0 | 4-M12 | F03 |
| DN25 | 25.0 | 48.0 | 76.0 | 160.0 | | 42.0 | 115.0 | 11*11 | 85.0 | 4-M12 | F04 |
| DN32 | 32.0 | 54.0 | 83.0 | 160.0 | | 42.0 | 140.0 | 11*11 | 100.0 | 4-M16 | F04 |
| DN40 | 38.0 | 62.0 | 99.0 | 185.0 | | 50.0 | 150.0 | 14*14 | 110.0 | 4-M16 | F05 |
| DN50 | 50.0 | 75.0 | 105.0 | 185.0 | | 50.0 | 165.0 | 14*14 | 125.0 | 4-M16 | F05 |
| DN65 | 65.0 | 90.0 | 132.0 | 230.0 | | 70.0 | 185.0 | 17*17 | 145.0 | 4-M16 | F07 |
| DN80 | 76.0 | 110.0 | 146.5 | 230.0 | | 70.0 | 200.0 | 17*17 | 160.0 | 8-M16 | F07 |
| DN100 | 94.0 | 150.0 | 161.0 | 318.0 | 102.0 | 70.0 | 220.0 | 22*22 | 180.0 | 8-M16 | F07/F10 |
| DN125 | 98.0 | 156.0 | 175.0 | 318.0 | 102.0 | 70.0 | 250.0 | 22*22 | 210.0 | 8-M16 | F07/F10 |

MATERIAL LIST

| Item | Description | Material |
|------|--------------|----------|
| 1 | HANDLE COVER | PLASTIC |
| 2 | HANDLE | 304 |
| 3 | NUT | 304 |
| 4 | STEM | 304 |
| 5 | STOP PIN | 304 |
| 6 | GLAND | 304 |
| 7 | STEM PACKING | PTFE |
| 8 | STEM SEAL | PTFE |
| 9 | CAP | 304/316 |
| 10 | BODY SEAL | PTFE |
| 11 | BODY | 304/316 |
| 12 | BALL SEAT | RPTFE |
| 13 | BALL | 304/316 |

FEATURES:

- Working pressure:PN16.
- Working temperature:-10℃ to 150℃.
- Suitable medium:W.O.G.
- PED97/23/EC(CE0343)Approved.
- Inspection Testing:API598,EN12266.

Flange surface: two options (Regular/Customized)

