


Cangzhou Changyuan Fittings Co.,ltd Con-Well Metal Vietnam Co.,ltd



Vietnam plant: Lot 12, N11 Road, Dat Do I Industrial Zone, Phuoc Long Tho Ward, Dat Do District, Ba Ria Vung Tau Province
Head office: No.33 Jiuhe East Road,Development Zone,Cangzhou,Hebei,China 061000
Casting&Forging Plant: No.26 Shigang Road,Development Zone,Cangzhou,Hebei,China 061000
Http://www.con-well.com E-mail: con-well@vip.163.com; sale@con-well.com

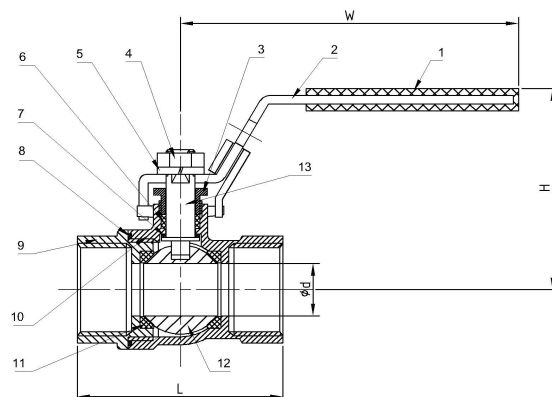

2PC BALL VALVE (REDUCE BORE) (mm)

DN	G	d	L	H	W	Unit weight(KG)
8	1/4"	10.0	51.0	47.0	93.0	0.178
10	3/8"	10.0	51.0	47.0	93.0	0.162
15	1/2"	10.0	51.0	47.0	93.0	0.165
20	3/4"	15.0	57.0	51.0	93.0	0.230
25	1"	20.0	66.0	58.0	112.0	0.390
32	1 1/4"	25.0	79.0	64.0	112.0	0.585
40	1 1/2"	32.0	89.0	77.0	140.0	0.965
50	2"	40.0	101.0	83.0	140.0	1.380
65	2 1/2"	50.0	132.0	100.0	187.0	2.530
80	3"	65.0	155.0	116.0	220.0	4.145

MATERIAL LIST

ITEM	DESCRIPTION	MATERIAL
1	PLASTIC COVER	PLASTIC
2	HANDLE	304/201
3	GLAND NUT	304
4	STEM NUT	304
5	THRUST WASHER	304
6	STEM PACKING	PTFE
7	STEM SEAL	PTFE
8	BODY SEAL	PTFE
9	CAP	CF8/CF8M
10	BODY	CF8/CF8M
11	BALL SEAT	RPTFE
12	BALL	304/316
13	STEM	304

FEATURES:

- Handle with lock can be choiced.
- Working pressure:1000PSI(PN64).
- Working temperature:-10°C to 150°C.
- Suitable medium:W.O.G.
- Thread: BSP,BSPT,DIN,NPT.
- PED97/23/EC(CE0343)Approved.
- Inspection Testing:API598,EN12266.