


Cangzhou Changyuan Fittings Co.,ltd

Add:No.26 Shigang Road,Development Zone,Cangzhou ,Hebei,China Pc:061000

[Http://www.con-well.com](http://www.con-well.com) email:con-well@vip.163.com

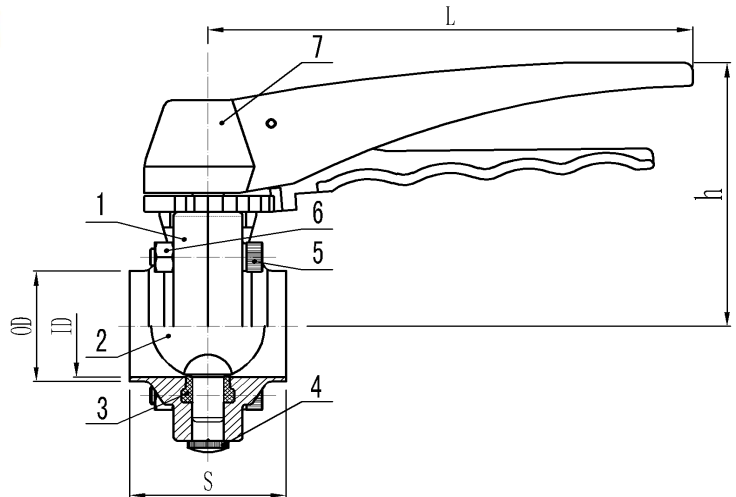

Welding Butterfly valve TYPE II (light)

SIZE	ID	OD	L	h	S
1"	21.9	25.7	155.0	80.0	42.0
1 1/2"	34.5	38.3	155.0	88.0	42.0
2"	47.5	51.1	155.0	96.0	46.0
2 1/2"	60.0	63.8	155.0	105.0	52.0
3"	72.0	76.3	155.0	110.0	52.0
4"	97.6	101.9	155.0	122.0	60.0

Material List:

ITEM	DESCRIPTION	MATERIAL
1	Body	304/316L
2	Disc	304/316L
3	Seal	EPDM/Silion
4	Plug	Plastic
5	Bolt	304
6	Nut	304



FEATURES:

- Rated Pressure: PN1.0Mpa
- PED97/23/EC (CE0038) Approved.
- Inspection Testing:API598
- Connection:welding
- Working temperture: -40℃~150℃

Cangzhou Changyuan Fittings Co.,ltd


Add:No.26 Shigang Road,Development Zone,Cangzhou ,Hebei,China Pc:061000

[Http://www.con-well.com](http://www.con-well.com) email:con-well@vip.163.com

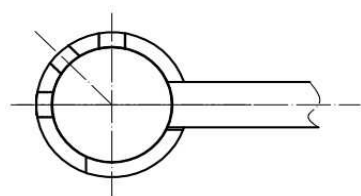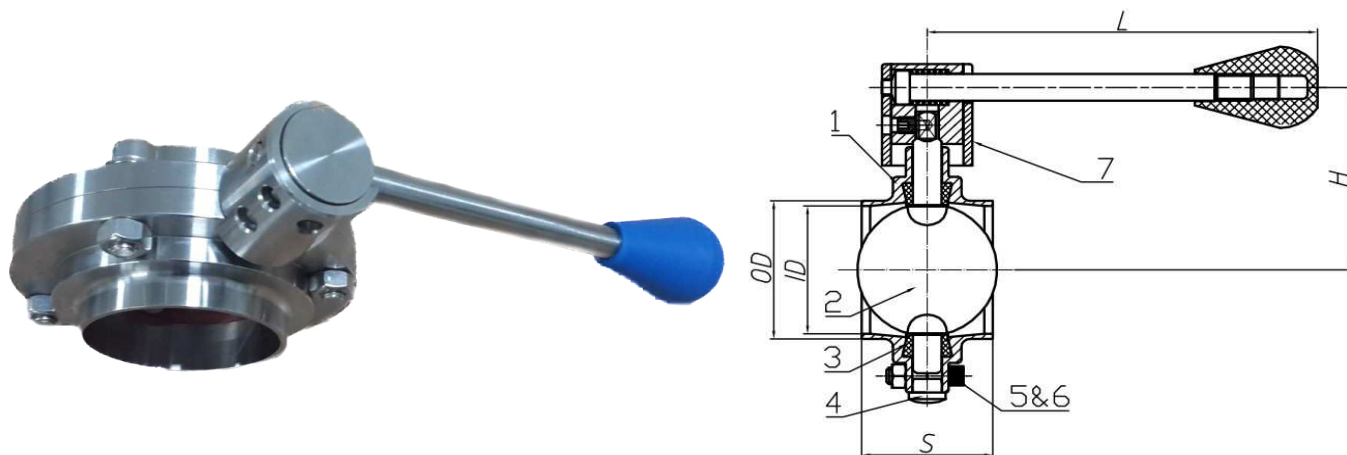

Direction (3 +1 holes)

or



Direction (4 +1 holes)

Welding Butterfly valve TYPE II (Light)

SIZE	ID	OD	L	H	S
1"	21.9	25.7	129.0	52.0	42.0
1 1/2"	34.5	38.3	129.0	59.0	42.0
2"	47.5	51.1	137.0	67.5	46.0
2 1/2"	60.0	63.8	137.0	76.5	52.0
3"	72.0	76.3	137.0	82.5	52.0
4"	97.6	101.9	147.0	97.0	60.0

Material List:

ITEM	DESCRIPTION	MATERIAL
1	Body	304/316L
2	Disc	304/316L
3	Seal	EPDM/Silion
4	Plug	Plastic
5	Bolt	304
6	Nut	304
7	Muti-position Handle	304(3 or 4 holes)

FEATURES:

- Rated Pressure: PN1.0Mpa
- PED97/23/EC (CE0038) Approved.
- Inspection Testing:API598
- Connection:welding
- Working temperture: -40℃~150℃